


International Standard Conditioners - "A" Case Enclosure

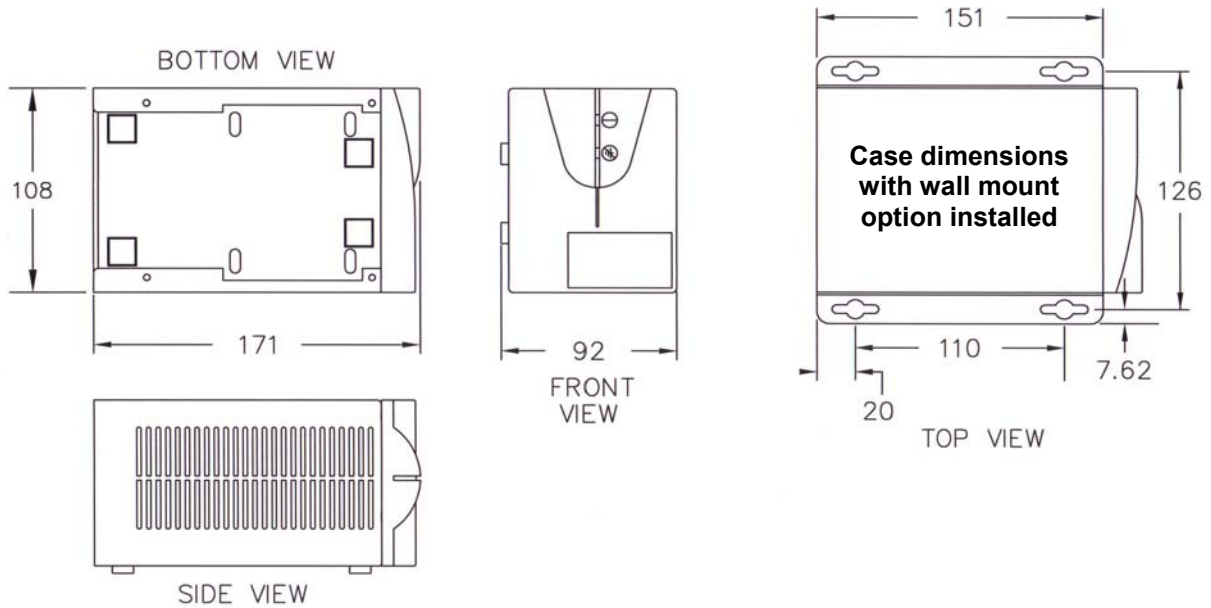

	ABC150-22INT* Part # 62006-XXR
VA Rating	150
Frequency	50/60 Hz.
BTU/Hr. Output	20
T.H.D. % Added	<1%
Load Surge Current @	
1/2 cycle	55 amps
1 second	20 amps
10 seconds	4.0 amps
Input Voltage	200-264
Output Voltage	200-264
Output Current	.65 amps
Efficiency	93%
Voltage Drop No Load to Full Load	8.4%
Wall mountable*	Yes
Compliance	VDE, CE, RoHS
Shipping Weight (kgs.)	5

* When ordering by model number, add "W" to model number above for wall mount option.

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.


International Standard Conditioners - "A" Case Enclosure Available Plug/Receptacle Options

POWERVAR Part #
ABC150-22INT - 62006-XXR**

When ordering, add two digit number from below in place of **XX to specify receptacle option desired.


Option 1

- 01 - IEC320 cord with Shuko plug and dual IEC320 strip
- 21 - IEC 320 cord with Shuko plug, dual IEC320 strip and wallmount



Option 2

- 03 - IEC320 output cord with dual IEC320 strip
- 23 - IEC320 output cord, dual IEC320 strip and wallmount



Warranty/Support: POWERVAR warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVAR, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVAR website at www.powervar.com.