


International Standard Conditioners - "D" Case Enclosure

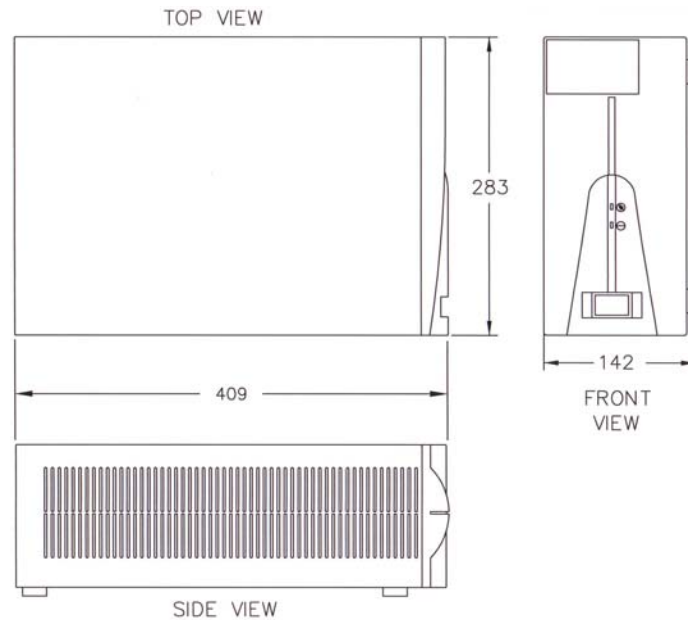

| | ABC1000-22INT Part # 62042-XXR | ABC1250-22INT Part # 62052-XXR | ABC1500-22INT Part # 62063-XXR | ABC2000-22INT Part # 62083-XXR | ABC2500-22INT Part # 62104-XXR |
|--|---|---|---|---|---|
| VA Rating | 1000 | 1200 | 1500 | 2000 | 2500 |
| Frequency | 50/60 Hz. | 50/60 Hz. | 50/60 Hz. | 50/60 Hz. | 50/60 Hz. |
| BTU/Hr. Output | 136 | 171 | 205 | 273 | 341 |
| T.H.D. % Added | <1% | <1% | <1% | <1% | <1% |
| Load Surge Current @ | | | | | |
| 1/2 cycle | 162 amps | 195 amps | 225 amps | 285 amps | 330 amps |
| 1 second | 78 amps | 92 amps | 108 amps | 125 amps | 160 amps |
| 10 seconds | 23 amps | 27 amps | 32 amps | 41 amps | 55 amps |
| Input Voltage | 200-264 | 200-264 | 200-264 | 200-264 | 200-264 |
| Output Voltage | 200-264 | 200-264 | 200-264 | 200-264 | 200-264 |
| Output Current | 4.16 amps | 5.12 amps | 6.25 amps | 8.33 amps | 10.42 amps |
| Efficiency | 96% | 96% | 96% | 96% | 96% |
| Voltage Drop No Load to Full Load | 5.2% | 4.8% | 4.4% | 4% | 4% |
| Earth Leakage Current | < 300 μamps | < 300 μamps | < 300 μamps | < 300 μamps | < 300 μamps |
| Wall mountable* | Yes | Yes | Yes | Yes | Yes |
| Compliance | VDE, CE, RoHS | VDE, CE, RoHS | VDE, CE, RoHS | VDE, CE, RoHS | VDE, CE, RoHS |
| Shipping Weight | 17 | 18 | 20 | 23 | 28 |

*Add "W" to model number for wallmount

International Standard Conditioners - "D" Case Enclosure

POWERVAR Part

ABC1000-22 -62042-XXR**


ABC1250-22 -62052-XXR**

ABC1500-22 - 62063-XXR**

ABC2000-22 - 62083-XXR**

ABC2500-22 - 62104-XXR**

When ordering, add two digit number from below in place of **XX to specify receptacle option desired.





Option 1

-02 - IEC320 inlet module, three IEC320 receptacle strips with two output cords

-12 - IEC320 inlet module, three IEC320 receptacle with Shuko plug

Option 2

-06 - Shuko plug with three Shuko receptacles




Option 3

-08 - Shuko plug with one Shuko receptacle and two IEC320 receptacle strip

Option 4

-09 - Shuko plug with two Shuko receptacles and one IEC320 strip



NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41 Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

Warranty/Support: POWERVAR warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVAR, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVAR website at www.powervar.com.