


iPOWER-DC²



DC-DC UPS provides uninterrupted power for a range of devices. Particularly suitable for WiFi routers and Fibre Optic installations to provide continuity of service for Telecare products, IP camera's and CCTV.

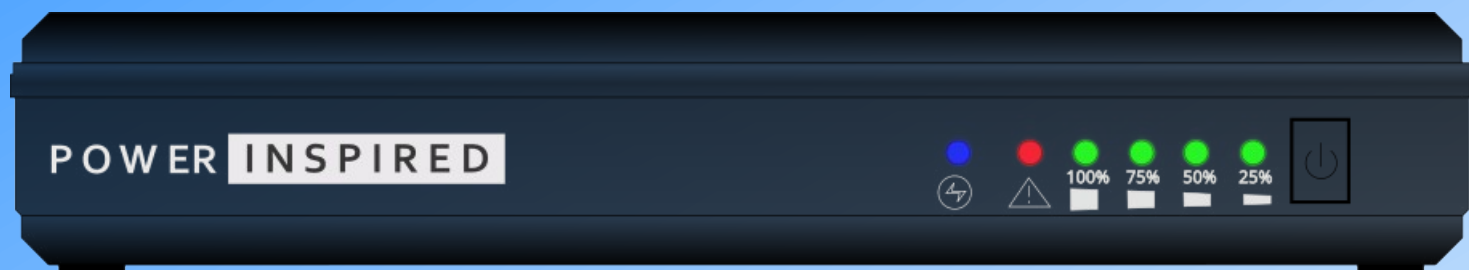

- Provides Uninterruptible DC Voltage
- Over an hour runtime for the majority of devices
- 9V, 12V or 24V input / output via selection switch
- USB 10W (2A) output
- High capacity Lithium Ion battery
- 5 Output Jack ports for multiple equipment
- 30W output capacity
- Cold start capability (Can be used as Powerbank)
- Battery and unit status LEDs
- Full battery and unit protection circuitry built in.
- Supplied with 2x 2.1/2.5 sprung DC-DC leads

Runtime Table	
WATTS	Runtime
5	> 6 hrs
10	> 3½ hrs
15	> 2 hrs
20	1½ hrs
25	1 hr
30	30 min

SPECIFICATIONS

Model	IPOWER-DC2
INPUT ¹	
Voltage Input	9V / 12V / 24Vdc
Range	9V : 8.7~9.7Vdc (4.14A)
	12V: 11.6 ~ 13.1Vdc (3.10A)
	24V: 23.2 ~ 25.4Vdc (1.55A)
Maximum Input Capacity	36W
OUTPUT	
Max Power	30W
[Total - USB+Jacks]	
USB Port	
Interface	USB Type A
Voltage	5V ±5%
Power Capacity	2.0A / 10W
DC Output Jacks ^{2,3}	
Power Capacity	30W
Voltage	9Vdc / 12Vdc / 24Vdc (as per selector switch)
Range	9V : 8.5~9.5Vdc (3.33A)
	12V: 11.4 ~ 12.6Vdc (2.50A)
	24V: 22.8 ~ 25.2Vdc (1.25A)
BATTERY	
Type	18650 Lithium Ion
Capacity	4x 3.7V 2500mAh (2S2P)
Total Capacity	37.0Wh / 10,000mAh
INDICATOR LEDS	
Battery Status	4x Green LED indicating 25, 50, 75 & 100% charge
	Flashing - Charging, @<10% discharging 25% LED flashes rapidly
Voltage	9V - Purple [Red/Blue], 12V - Blue, 24V - Red
	Flashing indicates on battery power
Red Fault LED	Overload / Voltage mismatch / Fault.
PROTECTION	
MCU	Overvoltage, overload, short circuit, over temperature
Battery	Over Charge, Over Discharge, Overload, short circuit
PHYSICAL & ENVIRONMENTAL	
Input Connection	5.5x2.1mm DC Jack
Output	USB Type A
	5x 5.5x2.1mm DC Jack
Dimensions (WxDxH mm)	160x107x29mm ± 1mm
Weight (Gross / Net)	435/375g
Temperature	Operating 0°C → 40°C Storage -10°C → 45°C
Humidity	0-90% Non Condensing
Altitude	To 2000m
APPROVALS ⁴	
UKCA / CE	BS EN61204-1, BS EN62477-1
	RoHS, EMC to BS EN61204-3,
Enclosure	ABS 94V0

NOTES

1. A regulated DC power supply must be provided at the required output voltage and rated at 36W for full load rating.
2. The output voltage on the DC jacks is set by the selector switch and should match the nominal input voltage.
3. Applicable at primary jack port. At secondary jacks the voltage may be lower at higher loads.
4. Product is exempt from Low Voltage Directive but designed in principle with safety and performance standards given.

Although every effort is made to ensure accuracy of this document, information is provided for guidance only and does not form part of any contract.
Specifications are subject to change without notice.

Power Inspired Ltd. Unit 6 Christmas Hill Business Park, Rycote Lane, Thame, Oxfordshire, OX9 2FZ, UK.
T: +44 1865 607033; W: www.powerinspired.com; E: info@powerinspired.com

DOC: BR-IPOWER-DC2 Rev 5.0